



EQUIPMENT SYSTEM







ERO EMISSIONS.* ERO COMPROMISE.



PETROL EQUIVALENT





NO PETROL OR EMISSIONS







THE EU AIMS TO BE CLIMATE-NEUTRAL



vibrations and tool maintenance.

The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete.

LEADING

Building on the strengths of FUEL™ technology, MX FUEL™ system reaches

new levels of cordless performance. Focused on matching petrol, corded and pneumatic equipment, MILWAUKEE® delivers the performance the professional user expects, while eliminating the hazards associated with emissions, noise.

> DECIBEL (DB) **REDUCTIONS**

NO RISK OF SPILLING FUEL

SAVE MORE THAN €1800 PER YEAR





M18 FUEL M12 FUEL



ENSURING OUR USERS CAN WORK SAFELY, SUSTAINABLY, AND PRODUCTIVELY.

NO LOSS OF POWER. NO LOSS OF PRODUCTIVITY. BETTER FOR YOUR PEOPLE. BETTER FOR OUR PLANET.

*Zero emissions when product in use

With zero emissions, there are no limitations on where work can be carried out. Indoors, underground, or in remote areas with no available power sources, MILWAUKEE®'s battery-power removes the traditional jobsite boundaries and opens up new opportunities for work.





UNRIVALLED TECHNOLOGY*

REDLITHIUM™ BATTERY PACK

Industry leader in lithium-ion technology

Patented design protects against drops, water and harsh environments

Robust electronics optimise performance for every equipment and battery combination



2 REDLINK PLUS™ INTELLIGENCE

Most advanced system of equipment electronics in the industry

Protects equipment with one of its kind thermal and overload monitoring

Delivers in-application communication, optimising equipment performance

POWERSTATE™ BRUSHLESS MOTOR

Engineered uniquely for the demands of each piece of equipment

Optimised for the perfect combination of performance, portability and productivity

Built with maximum magnet content and top-grade rare earth magnets for optimising equipment performance



WORLD LEADER IN LITHIUM BATTERY INNOVATION




SUPERIOR PACK CONSTRUCTION

Triple pack construction impact resitant housing, up to two subcores and up to 5x more rubber overmould to protect against drops, vibration, water, and extreme temperatures. This significantly improves durability in the most demanding equipment applications.







WORLD LEADING CELL TECHNOLOGY

MX FUEL** REDLITHIUM** batteries leverage the bestperforming and highest-quality lithium-ion technology, developed through deep partnerships with world leaders in cell design. MILWAUKEE** ensures optimum performance and life for the most demanding equipment applications through rigorous in-house testing in Milwaukee Tool's own world-class battery laboratory.

www.milwaukeetool.lt *As of February 2020 in the light equipment market www.milwaukeetool.lt



MXF PS

MX FUELT POWER





THE BEST TEMPORARY POWER **FOR THE JOB**

PORTABLE POWER ANYWHERE

MORE EFFICIENT **POWER**

FEATURES

- Building on the strengths of the FUEL™ technology, MX FUELTM system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration,
- Provides 3,600 peak watts and 1,800 continuous watts output of pure sine inverter energy, powering everything from high demand 16A tools to sensitive electronics.
- ✓ No emissions and quiet operation allow users to use it ✓ ONE-KEY™ tool tracking & security offers a free of
- ✓ Battery powered generator eliminates the cost of petrol, maintenance, reducing downtime and increasing jobsite productivity
- Built-in charger gives users the freedom to charge any MX FUEL™ batteries in the AC mode
- management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Robust roll cage design provides durability for outdoor

SPECIFICATIONS

	MXF PS-602
Running power (W)	1,800
Weight with battery (EPTA) (kg)	28.2 (2 x MXF XC406)
Includes	2 x MXF XC406 batteries, built-in charger, no kitbox
Article number	4933479266



MX FUEL[™] BATTERIES

- ✓ MX FUEL™ REDLITHIUM™ batteries leverage the best-performing and highest-quality lithium-ion technology
 ✓ Operates down to -28.0° temperature
 ✓ Most advanced electronic power mana
- ✓ Delivering AC power in a compact and portable battery pack, allowing users to work in areas where power
- ✓ MX FUEL™ REDLITHIUM™ batteries utilise unique
- ✓ Most advanced electronic power management system communicates with the tool in order to deliver full power in balance with maximum durability
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Enables the user to run tools in confined spaces as well as indoors or in trenches
- $\checkmark \quad \text{Offering a new solution in comparison to petrol} \\$

NEW NEW



MXF HD812 MXF XC-608 MXF XC406 MXF XC-2406 MXF CP-203 System MX FUEL™ MX FUEL™ MX FUEL™ MX FUEL™ MX FUEL™ Capacity (Ah) 12.0 8.0 6.0 6.0 3.0 3.0 Number of batteries 1 1 1 2 1 2 Charge duration MXF C 180 min 105 min 90 min 90 min 45 min 45 min Charge duration MXF SC 65 min 45 min 45 min 45 min 45 min Weightt (ko) 5.9 4.5 4.8 4.8 2.7 2.7							
Capacity (Ah) 12.0 8.0 6.0 6.0 3.0 3.0 Number of batteries 1 1 1 2 1 2 Charge duration MXF C 180 min 105 min 90 min 90 min 45 min 45 min Charge duration MXF SC 65 min 45 min 45 min 45 min 45 min		MXF HD812	MXF XC-608	MXF XC406	MXF XC-2406	MXF CP203	MXF CP-2203
Number of batteries 1 1 1 1 2 1 2 Charge duration MXF C 180 min 105 min 90 min 90 min 45 min 45 min Charge duration MXF SC 65 min 45 min 45 min 45 min 45 min	System	MX FUEL™	MX FUEL TM	MX FUEL™	MX FUEL™	MX FUEL™	MX FUEL™
Charge duration MXF C 180 min 105 min 90 min 90 min 45 min 45 min Charge duration MXF SC 65 min 45 min 45 min 45 min 45 min	Capacity (Ah)	12.0	8.0	6.0	6.0	3.0	3.0
Charge duration MXF SC 65 min 45 min 45 min 45 min 45 min 45 min	Number of batteries						
	Charge duration MXF C	180 min	105 min	90 min	90 min	45 min	45 min
Weight (kg) 5.9 4.5 4.8 4.8 2.7 2.7	Charge duration MXF SC	65 min	45 min	45 min	45 min	45 min	45 min
	Weight (kg)	5.9	4.5	4.8	4.8	2.7	2.7
Supplied in No kitbox	Supplied in	No kitbox	No kitbox	No kitbox	No kitbox	No kitbox	No kitbox
Article number 4932492128 4932492130 4933471837 4933479162 4933471838 4933479161	Article number	4932492128	4932492130	4933471837	4933479162	4933471838	4933479161

REDLITHIUM"

MX FUEL^{IM} BATTERIES

- ✓ Charges all MX FUEL™ batteries
- ✓ REDLINK™ intelligence optimise the charge rate for each battery to minimise charge time
- ✓ On-board carry handle
- ✓ LED Light indicates 80% state of charge







	MXF SC	MXF C
Charging ports	1 x MX FUEL™	1 x MX FUEL™
Charge type	Single	Single
Power source	AC	AC
Carry handle	Yes	Yes
Wall mountable	No	Yes
Weight (kg)	8.9	2.7
Supplied in	Supplied without a box	Supplied without a box
Article number	4932492848	4933471839

MX FUELT BATTERY AND CHARGER KITS ONE REY



	MXF NRG-406	MXF NRG-802	MXF NRG-122
System	MX FUEL™	MX FUEL™	MX FUEL™
Includes	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC608 batteries, MXF SC charger, no kitbox	2 x MXF HD812 batteries, MXF SC charger, no kitbox
Article number	4933479160	4933493548	4933493549

REDLITHIUM"



MXF CVBP

ONE KEY

MX FUELTM BACKPACK **CONCRETE VIBRATOR**

FEATURES

- ✓ The MX FUEL™ Backpack Concrete working on larger areas, delivering AC like performance without the hassle of laying cables or having the need for a AC socket on the jobsite
- ✓ It has the power to push up to ø63 mm head at over 11,200 VPM for
- instant power, eliminating the repetitive motions of a pull start and reducing downtime, allowing you to get jobs done faster without vou expect
- The modular design makes it easy to remove the backpack harness for
- Modular design with just one click from backpack to briefcase
- ✓ It can accept shafts up to 6.4 m long and heads up to ø63 mm without

- ✓ Consolidates up to 40 m³ of concrete on 1x MXF XC406 battery
- when using long shafts
- shafts are available separately
- Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools.
 ONE-KEY™ also features a remote locking functionality. Customisation adjustment to application



SPECIFICATIONS

	MXF CVBP-0	MXF CVBP-602	MXF CVBPKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Colums	V	v	v
Footings	VV	VV	VV
Slabs	VVV	VVV	VVV
Walls	✓	<i>V</i>	v
Weight with battery (EPTA) (kg)	15.7 (MXF XC406)	15.7 (MXF XC406)	15.7 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 2 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479595	4933479591	4933479593

REDLITHIUM"

MXF CVBC

MX FUELTM CONCRETE VIBRATOR

FEATURES

- ✓ Compact and slim design for as well as mobile applications
- Carrying strap and handle for increased flexibility on site and easy
- attachment of the vibrator to the
- √ The MX FUEL™ Briefcase Concrete working on walls and columns, delivering AC like performance without the hassle of laying cables or having the need for an AC socket on
- ✓ It has the power to push up to ø 63 mm head at over 11,200 VPM for optimal consolidation, even in the
- instant power, eliminating the and reducing downtime, allowing you to get jobs done faster withou sacrificing the power and run time you expect

- ✓ It can accept shafts up to 6.4 m long and heads up to ø63 mm without sacrificing power
- concrete on 1x MXF XC406 battery
- The wireless remote gives you the ability to turn the machine on from up to 9 m away for more freedom
- System attachments, heads and
- Building on the strengths of the FUEL™ technology, MX FUEL™ cordless performance. Focused performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping
- ONE-KEY™ tool tracking &





SPECIFICATIONS

	MXF CVBC-0	MXF CVBC-602	MXF CVBCKIT-602
Vibrations (1/min)	11,200	11,200	11,200
Colums	VVV	VVV	VVV
Footings	VV	VV	VV
Slabs	v	v	V
Walls	VVV	VVV	VVV
Weight with battery (EPTA) (kg)	10.3 (MXF XC406)	10.3 (MXF XC406)	10.3 (MXF XC406)
Supplied with	Remote control	Remote control	Remote control, 4 m vibrator shaft, 38 mm vibrator head
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933479607	4933479608	4933479610

REDLITHIUM"

BUILD YOUR KIT















CHOOSE VIBRATOR HEAD

	Slabs MXF CVBP	Slabs MXF CVBC		Footings MXF CVBC	MVE	Columns MXF CVBC	Walls MXF CVBP	Walls MXF CVBC	Article number			Ø (mm)	Article number	
MXF CVS-2 m	vvv	V	vvv	V	x	x	x	x	4932478611	0		25	4932479839	-
MXF CVS-3 m	vvv	V	vvv	~	~	V	V	V	4932479612		- Vibrator	38	4932478612	
MXF CVS-4 m	v	v	V	vv	vvv	vvv	vvv	vvv	4932478610	\bigcirc	heads	50	4932478613	
MXF CVS- 6.4 m	x	vvv	x	vvv	х	vvv	x	vvv	4932479613	0		63	4932479840	



MXF PSC

MX FUELTM SCREED



MXF DCD350

MX FUELTM 350 MM **DIAMOND CORE DRILL**



FEATURES

- ✓ The MX FUEL™ Screed is the larger areas, delivering petrol
- ✓ The push-button start delivers instant power, eliminating the and reducing downtime, allowing you to get jobs done faster withou sacrificing the power and run time
- ✓ The POWERSTATE® brushless. m bar at 9,000 VPM with a variable speed trigger, giving you maximum control in stiff and wet concrete
- ✓ Foldable handles for easy transport
- Easy quick connect system of the

- ✓ Up to 2 hrs of run time per charge with the 3.65 m blade and the MXF CP203 battery
- available separately
- Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards noise, vibration, tripping hazards and the frustrations of complex
- ONE-KEY™ tool tracking & cloud-based tracking network platform for your tools. ONE-KEY™ also features a remote
- Supplied with a 9/10" wrench

BLADES FOR MX FUEL™ SCREED (MXF PSC)





- Easiest coring anywhere
- ✓ Rig-mounted diamond coring up to 350 mm diameter. Core with confidence by delivering AC
- √ 4 speed gearing for a wide range of applications, with laser etched the metal body
- ✓ Speed 1: up to 51 mm / Speed 2: 51 - 76 mm / Speed 3: 76 - 152 mm / Speed 4: 152 - 350 mm
- ✓ On-board pressure gauge allows order to get the best lifetime of nachine and accessory
- On-board battery gauge allows the user to monitor battery capacity during entire drilling process

COMING SOON

- changes
- the core drill to the drill stand
- Can be used with optional vacuum pump on smooth and even surfaces
- Building on the strengths of the system reaches new levels of on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping complex maintenance
- ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools ONE-KEY™ also features a remote

POWER TO PULL 4.9 M BLADE

NO GAS HEADACHES

2 HOURS PER CHARGE W/ 3,65 M BLADE

POWER TO CORE 350 MM HOLES IN REINFORCED CONCRETE

EASIEST CORING ANYWHERE

TOOL-FREE QUICK LOCK CONNECTION

SPECIFICATION

MXF PSB-1.22 m

MXF PSB-1.83 m

MXF PSB-3.00 m

MXF PSB-3.65 m

MXF PSB-4.25 m

MXF PSB-4.87 m

	MXF PSC-0	MXF PSC-302	MXF PSCKIT-302
Vibrations (1/min)	9,000	9,000	9,000
Weight with battery (EPTA) (kg)	16.8 (MXF CP203)	16.8 (MXF CP203)	16.8 (MXF CP203)
Standard equipment	-	-	3 m blade
Includes	No batteries, no charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox	2 x MXF CP203 batteries, MXF C charger, no kitbox
Article number	4933479771	4933479772	4933479774

4932479780

4932479781

4932479782

REDLITHIUM"

SPECIFICATION

	MXF DCD350 DD-0	MXF DCD350 KIT-0	MXF DCD350 KIT-122
Max. drilling concrete (mm)	350	350	350
No load speed (rpm)	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200	0 - 390/ 0 - 850/ 0 - 1650/ 0 - 2200
Tool reception	1 ¼" UNC + ½" G	1 ¼" UNC + ½" G	1 ¼" UNC + ½" G
Weight with battery (EPTA) (kg)	27.6 (MXF HD812)	27.6 (MXF HD812)	27.6 (MXF HD812)
Standard equipment		MXF DCD350 DR stand	MXF DCD350 stand
Includes	No batteries, no charger, no kitbox	No batteries, no charger, no kitbox	2 x MXF HD812 batter- ies, MXF SC charger, no kitbox
Article number	4933493146	4933493142	4933493143

REDLITHIUM"

✓ Uniquely designed TURBO shaped segments -Pre-grinded, for best performance right from the first hole

 Engraving of diameter and type on the core reception ✓ Laser welded segments guarantee against break off ✓ 10 mm segment height for superior life time

✓ Standard 1 ¼' UNC reception

One outer and two inner slots enable improved cooling and increased material removal

WET DIAMOND DRILLING CORES WCHP & WCHP-SB ABOVE 52 MM



MXF DCD350 VP

MX FUEL[™] VACUUM PLATE

Article number 4932493147

- ✓ Vacuum plate with pressure gauge
- ▼ Tool-free attachment to MXF DCD350 MX FUEL™
 350 mm diamond core drill
- \checkmark Coring up to ø300 mm with vacuum

MXF DCD350-150 AP

MX FUEL™ VACUUM PLATE

Article number 4932493148

- ✓ Tool-free attachment to MXF DCD350 MX FUEL™ 350 mm diamond core drill
- √ Vacuum plate with pressure gauge
- recommended vacuum pump (4932352094)





- Ø (mm) Reception Working Total lenght Article number WCHP 52 mm 1 1/4" UNC - 1 pc WCHP 62 mm 1 1/4" UNC - 1 pc 1 1/4" UNC 450 4932399708 WCHP 82 mm 1 1/4" UNC - 1 pc 450 1 1/4" UNC 1 1/4" UNC 1 1/4" UNC WCHP 182 mm 1 1/4" UNC - 1 pc 1 1/4" UNC 4932399718 WCHP 202 mm 1 1/4" UNC - 1 pc 1 1/4" UNC 4932399719 WCHP 225 mm 1 1/4" UNC - 1 pc 1 1/4" UNC 450 4932399720 WCHP 250 mm 1 1/4" UNC - 1 pc 450 4932399721 250 1 1/4" UNC WCHP 300 mm 1 ¼" UNC - 1 pc 4932399722 300 1 1/4" UNC 350 WCHP 350 mm 1 1/4" UNC - 1 pc 1 1/4" UNC 4932399723



MX

MXF DCD150

ONETKEY

MX FUEL^M 150 MM DIAMOND CORE DRILL



EASIEST CORING ANYWHERE

152 MM CAPACITY

INCREASED PRODUCTIVITY

FEATURES

- ✓ Core with confidence by delivering AC performance with a maximum core diameter capacity of 152 mm
- 2 speed gearing for a wide range of applications, with laser etched speed and capacity markings into the metal body
- ✓ Speed 1: up to 75 mm diameter wet & dry coring at 1600 rpm
- ✓ Speed 2: 76 to 152 mm diameter wet & dry coring 800 rpm
- ✓ Patented AUTOSTOP™ clutch provides best in clas protection, preventing over rotating when losing control or in case of a stuck core
- ✓ On-board level sensor guides the user to achieve a straight and accurate finish whilst horizontal drilling
- On-board pressure gauge allows user to optimise drilling speed in order to get the best lifetime of machine and accessory
- ✓ On-board battery gauge allows the user to monitor battery capacity during entire drilling process
- ✓ Integrated water line for wet coring that is compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- √ 1 ½' UNC + ½' G core fitting to fit most common cores, with friction plate design allowing for easy core changes
- Separately available core drill stand MXF DR255TV with 60 mm collar - 60 mm mount on the core drill fit most universal core stands
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the hazards associated with emissions, noise, vibration, tripping hazards and the frustrations of complex maintenance
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality


SPECIFICATIONS

	MXF DCD150-0C	MXF DCD150-302C	MXF DCD150-302C KIT
No load speed (rpm)	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600	0 - 800/ 0 - 1600
Drilling capacity in concrete 1st/ 2nd gear (mm)	76 - 152/ 25 - 76	76 - 152/ 25 - 76	76 - 152/ 25 - 76
Tool reception	1 ¼″ UNC + ½″ G	1 ¼″ UNC + ½″ G	1 ¼" UNC + ½" G
Weight with battery (EPTA) (kg)	12.4 (MXF CP203)	12.4 (MXF CP203)	12.4 (MXF CP203)
Standard equipment	Trigger lock-on, side handle	Trigger lock-on, side handle	Trigger lock-on, side handle, MXF DR255TV drill stand
Includes	No batteries, no charger, box	2 x MXF CP203 batteries, MXF C charger, box	2 x MXF CP203 batteries, MXF C charger, box
Article number	4933478986	4933464887	4933471835

MXF DR255TV

PREMIUM MX FUEL™ DIAMOND DRILLING STAND FOR DIAMOND CORE DRILL

Article number 4933472247



- ✓ Tool-free machine and watertank attachment compatible with M18™ SWITCH TANK™ 15 I water supply
- ✓ With extra long column for use with cordless MXF DCD150 diamond drilling tool, for drilling holes up to e250 mm
- ✓ Can be used with vacuum pump on smooth and even surfaces
- ✓ Drill angle indication on base plate, can be variably tilted from 0° to 45°
- ✓ Adjustable sliding blocks
- ✓ Lightweight and durable aluminium design
- ✓ Concrete drop anchor fixing set (4932399731) included

VACUUM PUMP VP6

Article number 493235209

✓ Vacuum pump VP6 for fastening of the diamond drill rig on smooth and even surfaces. Suction capacity: 850 mbar. Max. vacuum pressure: 6 m³/h/ 100 l/min. Rated voltage: 220-240 V. Supplied with 5 m hose with DW7 connection



FIXING KIT

Article number 493239973

 Fixing kit for exclusive use in concrete. e16 mm drill bit is required to set the drop anchor. Kit includes stud bolt, setting tool, wing nut, washer and 5 pcs of M12 drop anchor



VACUUM SEAL

Article number 4931400613

✓ Replacement seal for the drilling rig. To vacuum fix the rig on the ground/wall



WT 10 WATERTANK

Article number 4932399726

✓ Watertank WT 10. 10 liters capacity, steel water tank with inside and outside polyester coating. Reliable brass pump with a max. pressure bar of 6 bar. 2.5 m hose with quick connection system fits direct to MILWAUKEE® diamond drills



WATER COLLECTION RING MAX. Ø 180 MM

Article number 4932399727

✓ Watertank WT 10. 10 liters capacity, steel water tank with inside and outside polyester coating. Reliable brass pump with a max. pressure bar of 6 bar. 2.5 m hose with quick connection system fits direct to MILWAUKEE® diamond drills

MX FUEL™ THIN KERF WET DIAMOND DRILLING CORES

- Standard 1/2" G reception up to 45 mm, standard 1 1/4" UNC reception from 46 mm to 150 mm
- ✓ Laser welded segments guarantee against break off
- ✓ 10 mm segment height for superior life time
- ✓ For wet drilling
- ✓ Suitable for reinforced concrete

Model	Ø (mm)	Reception	Working lenght (mm)	Total length (mm)	Article numb
WCHP-TK 12 mm	12	½″ G	200	270	493247216
WCHP-TK 14 mm	14	½″ G	300	370	493247216
WCHP-TK 16 mm	16	½″ G	300	370	493247216
WCHP-TK 18 mm	18	½″ G	300	370	493247217
WCHP-TK 20 mm	20	½″ G	300	370	493247217
WCHP-TK 22 mm	22	½″ G	300	370	493247217
WCHP-TK 24 mm	24	½″ G	300	370	493247217
WCHP-TK 25 mm	25	½″ G	300	370	493247217
WCHP-TK 28 mm	28	½″ G	300	370	493247217
WCHP-TK 30 mm	30	½″ G	300	370	493247217
WCHP-TK 32 mm	32	½″ G	300	370	493247217
WCHP-TK 35 mm	35	½″ G	300	370	493247217
WCHP-TK 40 mm	40	½″ G	300	370	493247218
WCHP-TK 46 mm	46	1 ¼" UNC	450	525	493247895
WCHP-TK 51 mm	51	1 ¼" UNC	450	525	493247218
WCHP-TK 56 mm	56	1 ¼" UNC	450	525	493247218
WCHP-TK 61 mm	61	1 ¼" UNC	450	525	493247218
WCHP-TK 66 mm	66	1 ¼" UNC	450	525	493247218
WCHP-TK 68 mm	68	1 ¼" UNC	450	525	493247895
WCHP-TK 71 mm	71	1 ¼" UNC	450	525	493247218
WCHP-TK 76 mm	76	1 ¼" UNC	450	525	493247218
WCHP-TK 81 mm	81	1 ¼" UNC	450	525	493247219
WCHP-TK 86 mm	86	1 ¼" UNC	450	525	493247219
WCHP-TK 91 mm	91	1 ¼" UNC	450	525	493247219
WCHP-TK 101 mm	101	1 ¼" UNC	450	525	493247219
WCHP-TK 105 mm	105	1 ¼" UNC	450	525	493247219
WCHP-TK 111 mm	111	1 ¼" UNC	450	525	493247219
WCHP-TK 121 mm	121	1 ¼" UNC	450	525	493247219
WCHP-TK 126 mm	126	1 ¼" UNC	450	525	493247895
WCHP-TK 130 mm	130	1 ¼" UNC	450	525	493247219
WCHP-TK 140 mm	140	1 ¼" UNC	450	525	493247219
WCHP-TK 150 mm	150	1 ¼" UNC	450	525	493247219

DRILLING SHROUD PHDE152

Article number 4932471990

✓ Drilling shroud for drilling and dry coring from 25 - 152 mm. Brush insert to improve suction and extraction





MXF COS350



MX FUELTM 350 MM **CUT-OFF SAW**



FASTEST CUTS FROM START TO FINISH

350 MM CUT CAPACITY

NO GAS HEADACHES

FEATURES

- ✓ The world's first 350 mm battery powered cut-off saw to deliver the power to cut reinforced concrete with a
- ✓ Faster cuts, start to finish: 3 second push button start up eliminates the need to mix petrol and oil, and avoids
- load speed of 5370 rpm and a full 125 mm depth of cut
- ✓ Quieter than other petrol equivalent saws, with a low engine vibration and well-balanced weight
- Keyless adjustable blade guard & on-board water line SWITCH TANK™ interchangeable sprayer and water
- Separately available cut-off saw cart MXF COSC to
- Supplied with HUDD 350 mm diamond blade (4932471985), contractor bag for batteries and charge
- ✓ Building on the strengths of the FUEL[™] technology, MX FUEL[™] system reaches new levels of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver without the tripping hazards and the frustrations of complex
- ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inve management platform for your tools. ONE-KEY™ also features a remote locking functionality

SPECIFICATIONS

	MXF COS350-0	MXF C0S350-602
No load speed (rpm)	5370	5370
Blade diameter (mm)	350	350
Bore size (mm)	20/ 25.4	20/ 25.4
Max. cutting depth (mm)	125	125
Weight with battery (EPTA) (kg)	16.7 (MXF XC406)	16.7 (MXF XC406)
Includes	No batteries, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger, no kitbox
Article number	4933478984	4933464881



- ✓ Light weight 350 mm cut-off saw cart to maintain straight cuts with full 125 mm depth of cut capacity
- Height-adjustable drive handle and easy to reach depth adjustment handle to facilitate one-handed operation
- Tool-free machine and water tank attachment compatible with the M18™ SWITCH TANK™ interchangeable sprayer and water supply system
- ✓ Full mobility with on-board spare battery storage
- ✓ Easily collapsible for transport and storage
- ✓ Supplied with 11.4 I gravity feed tank

M18 BPFPH-0

M18™ SWITCH TANK™ POWER BASE

- ✓ The M18™ SWITCH TANK™ 15 I backpack fluid pump sprayer delivers the industry's first interchangeable tan design with no manual pumping
- The interchangeable tank design isolates the pump, hose SWITCH TANK™ powered base
- ✓ Add on and replace tank assemblies to eliminate cross chemical contamination and lower cost of ownership
- ✓ Features adjustable pressure selection dial to best suit

REDLITHIUM"

M18 BPFP-WST

M18™ SWITCH TANK™ 15 L **WATER SUPPLY**

Article number 4933464965

- ✓ Fully compatible with SWITCH TANK™
- ✓ Water sprayer tank for efficient water delivery for washing up slurry's, areas and equipment
- ✓ Semi-transparent tank with measuring scale to know how much liquid is inside the tank

SPEEDCROSS ADD

- ✓ ADD is most suitable for asphalt
- stability whilst cutting
- Angled, special wear-retardant segments to avoid a segment tear-off

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
ADD 350 mm	350	25.4	10	2.8	4932478952

SPEED CROSS

- ✓ Maximum Speed, Long Life, Low Vibration
- ✓ Universal blade for a variety of materials
- ✓ Classed into two categories for maximum lifetime
- √ 10 mm segments height to ensure long lifetime
- ✓ Laser welded segments for best performance



SPEEDCROSS HUDD



Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
HUDD 350	350	25.4	8	2.6	4932471985

DUH DIAMOND BLADES





A trade laser welded quality blade with exceptional performance in hard mate such as hard concrete, block paviors and masonry products

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article numbe
DUH 350	350	25.4	10	2.8	4932471986

SPEEDCROSS STEELHEAD™ DIAMOND BLADES





- ✓ STEELHEAD™ is most suitable for steel and stainless steel. Also suitable f
- ✓ High density of special brazed diamonds ensure a very aggressive cutting

Туре	Disc diameter (mm)	Bore size (mm)	Segment height (mm)	Cutting width (mm)	Article number
STEELHEAD™ 350	350	25.4		2.8	4932471988

PRO+ METAL CUTTING DISC



- Suitable for acid-resistant steel, hardox, high-alloy steel, mild and tool ste suitable for stainless steel
- ✓ Applications: Iron and sulphur free thin cut-off wheels for steel

Туре	(mm)	Thickness (mm)	Bore size (mm)	Article number
SCS 41 /350	350	4	25.4	4932471989

DUCTILE & STONE CUTTING DISC



Applications: Ductile iron, non-ferrous metals & stone

Туре	Disc diameter (mm)	Thickness (mm)	Bore size (mm)	Article number
CCS 41 / 350	350	4	25.4	4932472264



MXF DH2528H

MX FUEL^M 25 KG CLASS 28 MM HEX DEMOLITION HAMMER





MOST PRODUCTIVE, LOWEST VIBRATION

FASTER, SAFER, EASIER, DEMOLITION

LIGHTEST WEIGHT

FEATURES

- ✓ The industry's first cordless 28 mm Hex demolition hammer, delivering the power of petrol, corded and pneumatic
- Heavy Duty hammer provides 64 blow Joules of impact energy for toughest demolition applications
- ✓ Floating body anti-vibration technologies allows the user to work all day without reaching dangerous
- ✓ Low 5.17 m/s² vibrations for over 7 hrs (HAVS) non-stop productivity
- ✓ Fast material removal at 1300 BPM, providing maximum productivity in all applications
- ✓ Breaks up to 2 tons of concrete or a 12 m (20 cm deep and 30 cm wide) trench on 1 x MXF XC406 battery
- integrated service indicator light alerting the user every 40 hours to add grease
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new levels of cordless performance.
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality
- Supplied with 1 x 28 mm Hex pointed chisel (4932459774), 1 x 28 mm Hex 35 mm flat chise (4932459775)

SPECIFICATIONS

	MXF DH2528H-0	MXF DH2528H-602
Tool reception	28 mm K-Hex	28 mm K-Hex
Blow energy (EPTA) (J)	64	64
Full load hammer action (BPM)	1300	1300
Vibration chiseling (m/s²)	5.17	5.17
Weight with battery (EPTA) (kg)	29.6 (MXF XC406)	29.6 (MXF XC406)
Includes	No bettery, no charger, no kitbox	2 x MXF XC406 batteries, MXF C charger,no kitbox
Article number	4933478985	4933464877



MXF DHT

BREAKER TROLLEY FOR MX FUEL^{IM} DEMOLITION HAMMER

Article number 4933464879

- Lightweight demolition hammer cart with large rubber wheels for easy transport across uneven terrain
- Integrated demolition hammer retention strap and full-metal fastening locations
- ✓ On-board spring-loaded storage locations for 4 chisels
- ✓ Battery & charger storage dock with charger cable hook for transport

AS 30 MAC

30 L M-CLASS DUST EXTRACTOR

Article number 4933459415

- ✓ Compact 30 litre tank for site/workshop use
- √ 4500 litres/min airflow with 250 mbar suction
- ✓ Dust class M. Standard MAK-factor > 0.1 mg/m³: miner dust, wood dust (oak, beech)
- ✓ Power take off for auto switching of powertools

AS 42 MAC

42 L M-CLASS DUST EXTRACTOR

Article number 4933459418

- ✓ Compact 42 litre tank for site/workshop use
- ✓ 4500 litres/min airflow with 250 mbar suction
- Dust class M. Standard MAK-factor > 0.1 mg/m³: mineral dust, wood dust (oak, beech)
- ✓ Power take off for auto switching of powertools
- ✓ Durable PTFE filter with high filtration efficiency and washable non-stick membrane

28 MM HEX CHISELS



	Description	Total length (mm)	Blade width (mm)	Article number
1.	28 mm Hex pointed chisel	400	-	4932459774
2.	28 mm Hex flat chisel	400	35	4932459775
	28 mm Hex flat chisel	400	80	4932459776
4.	28 mm Hex spade chisel	400	125	4932479221
5.	28 mm Hex asphalt cutter	440	115	4932479222
6.	28 mm Hex toolholder	390	-	4932479223
7.	28 mm tamping plate	200	200	4932479224

BREAKER BOOT

Article number 493247199

- ✓ Universal fit Fits most 28 & 30 mm breaking hammers. Perfect match to 28 mm MX FUEL[™] breaker.
- ✓ Universal fit to pointed and flat chisels
- ✓ Slim design for reaching tight areas
- ✓ Hose clip adapter for easy attachment to MILWAUKEE® vacuum cleaners





MXF LSDP

ONETKEY

MX FUELTM LARGE SEWER DRUM MACHINE WITH **POWERTREDZTM**



POWERTREDZ™ LIFT ASSIST

MESS CONTAINED

POWER TO CLEAR ROOTS AT 60 M

FEATURES

- ✓ The MX FUEL™ large sewer drum machine with integrated POWERTREDZ™ assists one-person only to move the sewer machine in and out of the service van,
 ✓ Fully enclosed drum eliminates free spinning parts, providing the user with more protection whilst working in and around fragile fixtures as well as better mess up and down building stairs
- World's first battery powered large drum machine that uses MILWAUKEE® 16 mm and 20 mm inner core spirals in drains from 75 mm up to 200 mm, with the power to clear roots up to 60 m down the line
- containment whilst unclogging drains
- ✓ Electronic foot pedal with non-slip grip and an integrated drum brake electronically slows the drum very fast for maximum end user control and safety
- ✓ MX FUEL™ drum capacity for 16 mm x 30 m long and
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEYTM also features a remote locking functionality

SPECIFICATIONS

	MXF LSDP-301
No load speed (rpm)	200
Drain capacity (mm)	75 - 200
Spiral diameter (mm)	20
Spiral length (m)	23
Weight with battery (EPTA) (kg)	56.6 (MXF CP203)
Standard equipments	1 x 20 mm x 15,2 mm inner core cable 1 x 20 mm x 7,6 mm inner core cable, 1 x 9 pc head attachment kit
Includes	1 x MXF CP203 battery, MXF C charger, no kitbox
Article number	4933471851





ACCESSORIES - MXF LSDP

	Description	Compatible with model MXF LSDP	Article number	
	16 mm x 7,6 m Inner core	V	4932471701	
	16 mm x 15,2 m Inner core	✓	4932471702	
	20 mm x 7,6 m Inner core	v	4932471703	
Inner core SD	20 mm x 15,2 m Inner core	✓	4932471704	
	16 mm Anchor cable	V	4932471707	
	16 mm x 60 cm Anchor cable	V	4932471708	er announcement and an arrangement and arrangement and arrangement and arrangement and arrangement and arrangement and arrangement are arrangement and arrangement are arrange
	20 mm x 600 mm Anchor cable	V	4932471709	E
Straight auger SD	Medium funnel auger for 10, 13, 16 mm cables	v	48532830	
Funnel auger SD	Funnel auger for 16, 20 mm cables	V	48532831	₩
	75 mm root cutter for 16 & 20 mm cables	V	48532832	~
Root cutter SD	100 mm root cutter for 16 & 20 mm cables	V	48532833	
	150 mm root cutter for 16 & 20 mm cables	V	48532834	
Occasion tool CD	Small opening tool for 16, 20 mm cables	V	48532835	
Opening tool SD	Medium opening tool for 16, 20 mm cables	V	48532836	
Chain knocker SD	75 mm chain knocker for 16, 20 mm cables	V	48532837	
GHAIH KHUCKEI SU	100 mm chain knocker for 16, 20 mm cables	V	48532838	
Head kit SD	9 pc head kit 16, 20 mm cables	v	48532840	
Guide hose for model MXF LSDP	Guide hose for model MXF LSDP	V	4932478110	
Pin key	Pin key for all cables	V	4932471717	0



MXF PTR2

MX FUELTM PIPE SOON THREADING MACHINE

COMING ONE KEY



MXF TL

MX FUELTM TOWER LIGHT



FEATURES

- \checkmark Threading capacity from 1/8" all the way up to 2"
- ✓ One stop shop: Cut, Ream and Thread with one tool
- ✓ Maximum mobility thanks to foldable wheel cart with tool free setup ✓ Unique vertical storage capability
- transportation or in the warehouse High versatility through front and backside fully featured hammer chucks that allow use of grooving
- ✓ All day long run time with up to 140 cycles (Cut+Ream+Thread) on one MX FUÈL™ 6.0 Ah battery
- ✓ Integrated auto oil system with oil

Outstanding performance with 2 speed settings of 39 RPM and 59 RPM matching corded speed

- √ Threading capacity from 1/8" all the
- ✓ ONE-KEY™ tool tracking & security offers a free of charge cloud-base management platform for your tools. ONE-KEY™ also features a remote locking functionality
- ✓ Building on the strengths of the FUEL™ technology, MX FUEL™ system reaches new lev of cordless performance. Focused on petrol, corded and pneumatic performance, these tools deliver



301

MAXIMUM MOBILITY

FAST SET UP

UP TO 140 3/4" CYCLES ON ONE MX FUEL™ 6.0 AH BATTERY CHARGE

SPECIFICATIONS

	MXF PTR2-601
Speed settings	2
No load speed (rpm)	0 - 39/ 0 - 59
Thread size (inch)	¹/ ₈ ″-2″
Standard equipment	1/2"-3/4" BSPT HS die set, 1"-2" BSPT HS die set
Weight with battery (EPTA) (kg)	115 (MXF XC406)
Includes	1 x MXF XC406 battery, MXF C charger, no kitbox
Article number	4933492100

PIPE THREADER DIES

	_	
N	I⊐∖	٧,٢

Description	Туре	Thread size (inch)	Article number
PTR2D 1/2" - 3/4"	NPT	1/2 - 3/4	48361205
PTR2D 1" - 2" NPT HSS	NPT HSS	1 - 2	48361206
PTR2D 1/2" - 3/4" BSPT 4	BSPT Alloy	1/2 - 3/4	4932492924
PTR2D 1" - 2" BSPT Alloy	BSPT Alloy	1 -2	4932492925
PTR2D 1/2" - 3/4" BSPT HS	BSPT HS	1/2 - 3/4	4932492926
PTR2D 1" - 2" BSPT HS	BSPT HS	1 - 2	4932492927
PTR2D 1/2" - 3/4" BSPT	BSPT HSS	1/2 - 3/4	4932492928
PTR2D 1" - 2" BSPT HSS	BSPT HSS	1 - 2	4932492929



PTR2 DH NPT

NPT DIE HEAD FOR MX FUEL™ **STATUIONARY 2"** PIPE THREADER



Article number 49165100

PTR2 CW

PIPE CUTTER WHEEL FOR MX FUEL™ **STATUIONARY 2"** PIPE THREADER Article number 48361401

20 www.milwaukeetool.lt



PTR2 DH BSPT

BSPT DIE HEAD FOR MX FUEL™ **STATUIONARY 2"** PIPE THREADER



PTR2 RC

REAMER CONE THREADING **MACHINE FOR** MX FUEL[™] **STATUIONARY 2" PIPE THREADER**



MOST PORTABLE 3 M LIGHT, INSIDE/OUTSIDE

REDLITHIUM

27000 LUMENS, TASK OR **AREA**

WITHSTANDS THE STORM

FEATURES

- ✓ TRUEVIEW™ high definition light output with up to 27000 lumens in AC and up to 20000 lumens in DC node for both task and area lighting
- ✓ Has the ability to manoeuvre the light heads in multiple.
- ✓ Low weight of 48 kg with the two big all-terrain wheels, uneven job site terrains with minimum effort
- ✓ Due to the motorised mast, the tower light is capable to be set up in less than 10 sec. The mast is extendable up
- To withstand the toughest conditions on the toughest job sites, the MX FUEL™ Tower Light is built with a superior impact durability
- protected from the elements at all times
- ONE-KEY™ tool tracking & security offers a free of charge cloud-based tracking network and inventory management platform for your tools. ONE-KEY™ also features a remote locking functionality. Customisation function allows for precise tool adjustment to
- The built-in MX FUEL™ charger gives you the freedom to charge any MX FUEL™ battery in the AC mode
- ✓ IP 55 rating

SPECIFICATIONS

	MXF TL-601	
System	MX FUEL™	
Battery compatibility	All MX FUEL™ batteries	
Light	LED	
Max. AC light output high/medium/low/strobe (lumens)	27,000/ 14,000/ 7000/ -	
Max. DC light output high/medium/low/strobe (lumens)	20,000/ 10,000/ 5000/ -	
Max. Run time AC mode (h)	Endless	
Max. Run time with MXF XC406 (h)	3/ 6/ 10	
Max. Mast height (m)	3.1	
Weight with battery (EPTA) (kg)	53 (MXF XC406)	
Includes	1 x MXF XC406 battery,integrated charger, No kitbox	
Article number	4933471844	



www.milwaukeetool.lt 21








MILWAUKEE® IS THE SOLUTIONS PROVIDER





UNLOCKING THE DIGITAL JOBSITE

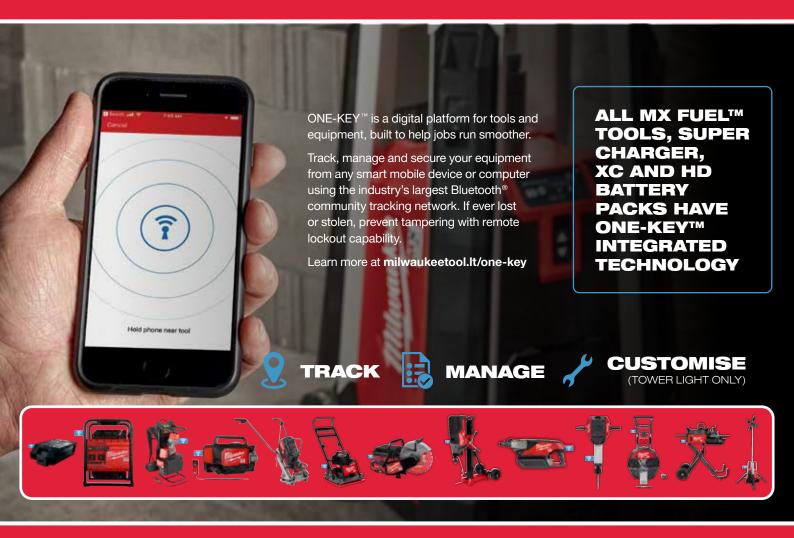

DOWNLOAD THE FREE ONE-KEY™ APP VIA THE APP STORE OR GOOGLE PLAY STORE.





PLEASE SEE OUR POWERTOOLS AND ACCESSORIES CATALOGUES FOR MORE INFO, OR GO ONLINE AT **MILWAUKEETOOL.LT**

Distributed by:

Techtronic Industries Nordic Aps

Stamholmen 147, 1., 2650 Hvidovre, Denmark Puh. +358 800 1 09000 milwaukeetool.lt

